

## J9512 SE/CF. MIDI GREASER (LOW PRESSURE)



### Grease Types

Our Grease Guns and Pumps are designed to handle most of the popular multipurpose greases to NLGI – No.2 specification made with light to medium base oil viscosities. However, with greases for special applications, which may have high viscosity base oils and/or special additives, problems may be encountered. If so, the question of pump-ability should be referred to the appropriate grease manufacturer.

**High Volume - 'Low Pressure'** pump part no J9512 SE/CF.


All greasers are supplied with lid and rubber-edged follower plates as standard, to reduce the grease 'vortexing' and causing 'cavitation' in the containers.

### Specification:

High volume output for filling auto lubrication system reservoirs. Supplied with 1.5m of 3/8" (9mm) hose and 1/4" BSP male end fitting, for your quick release connector and lid. A male quick release coupling is available to replace the reservoir filler nipple, part no J2252/CFM/1/8.

**\*Note:** The female coupler fits most male fittings on chassis systems. (ISO 'B' Type).

## J4512SE HIGH PRESSURE MIDI GREASER

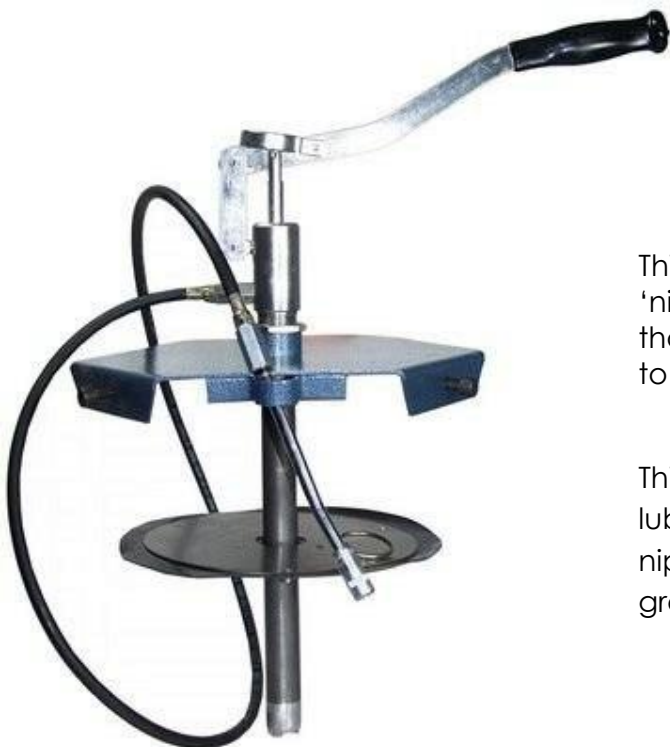

This pump will fit directly to the filler 'nipple' but has a lower output volume than the one above, and will take longer to fill the reservoir. For 12.5kg Grease kegs.

This pump is also used for direct lubrication of your bearings with the nipple connector, saving money on grease by buying it in 12.5kg bulk drums.



### A1058 SE - HIGH PRESSURE GREASER

This pump will fit directly to the filler 'nipple' but has a lower output volume, and will take longer to fill the reservoir. For 18/20kg kegs.

This pump is also used for direct lubrication of your bearings with the nipple connector, saving money on grease by buying it in 18/20kg bulk drums.

### MINILUBE K7

A portable greasing system designed for use on-site or in workshop environments. Macnaugh produces models to suit pail sizes from 2.5kg (5lbs) to 5kg (11 lbs) with depths of 146mm to 225mm.

#### FEATURES:

- spring loaded system - 30 shots of grease per prime
- high pressure, high volume KR grease gun
- 1.5 m (5 ft) x 12 mm (1/2") ID delivery hose
- rubber edged follower
- 360° swivel to prevent hose kinking
- fully sealed to prevent contamination
- complete set with refillable containers K6-24 (2.5 kg , 5 lbs) or K6-67 (5kg 11lbs) available
- refillable containers also available separately (KT5, KT6)
- fully serviceable
- 10 year warranty and parts guarantee

#### SPECIFICATIONS

- Grease viscosity: Up to NLGI No.2
- Wetted Components: aluminium, steel, brass and nitrile rubber
- Gun pressure: Up to 69,000 kPa (10,000psi, 690 bar) on high pressure
- Output: approx. 1.25g on the high volume setting  
approx. 0.45kg on the high pressure setting

#### ACCESSORIES:

- KT5 (2.5 kg)/KT6 (5 kg) Grease Container
- KZD Needle nose coupler
- KZHY Hyperdermic Needlepoint Coupler
- KFR Rigid/Flexible Extension
- KDF13 Flexible Extension
- KSR Standard Buttonhead Coupler



## HIGH VOLUME GUNS



### Features:

- Develops up to 1,800 psi pressure
- High output per stroke
- Patented follower allows cartridge or bulk loading without gun disassembly
- Cast Iron head for durability
- Vinyl cover for a comfortable and sure grip
- 3 way loading (14 ounce cartridge, suction, or fast refill from Alemite Loader Pump)

Product	Description	Pressure	Delivery	Cylinder Capacity	Incl.
4015-A4	Lever Gun, High Volume	1,800 psi	1 oz/7 strokes	16oz	Rigid ext. & coupler
4015-B4	Lever Gun, High Volume	1,800 psi	1 oz/7 strokes	24oz	Rigid ext. & coupler